

# AD 330

Doosan  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

<b>2000/14/EC</b>	&\$\$\$( #
	z) \$ z' \$z' D:

	"	kw	"	kw	Amp
400/230	330,00	264,00	300,00	240,00	433,00

fP GDE	GC, ) &
fDF DE	GC" \$(**
%\$1	z&(

**Standard Specifications**

z

fl ! E

z

z

**ALTERNATOR**

D: A Z'5JF

fl

fl " E

fP \$\$# \$\$\$ E

**TRANSFER SWITCH**

fl

# AD 330

Doosan  
Mecc Alte  
D+' &''

1

Manufacturer		Doosan		
Model		P126TI-II		
		% \$ \$' "# "		
		294,00 kw [394,00HP]		
	L	11,050		
	"	123 x 155		
		17,0:1		
	fl # ȷ	"# "	1500	
	fl ȷ	L	23,00	
		L	65,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	20,10		
	' # "	295,00		
fl ' # ȷ	' # "	47,40		
	° C	590,00		
		24 V d.c.		
	Load	% \$ \$i	'+) i	) \$i
	# "	63,10	47,00	31,30

2

		Mecc Alte		
		ECO 38-2LN/4		
	Hz	50		
	"	300,00		
7cg'		0,80		
		3		
	fl ȷ	400/230		
	A	433,00		
Temperature		H		


3

		fl ȷ		fl ȷ	
	"	"	"	"	L
AD 330	2375,00	2950,00	1300,00	1588,00	450,00
		fl ȷ		fl ȷ	
	"	"	"	"	L
MS 60	3065	3960	1356	2097	470

# AD 330

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

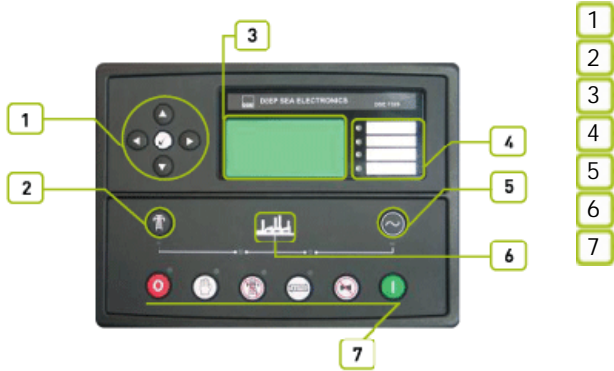

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$' ž ž " 8G9+' &\$' 8G9+' &\$' ž " % &1 \*(' " žFG&' &žFG(,) ž " ž

# AD 330

Doosan  
Mecc Alte  
D+ &

f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B\*\*\$-)\$

6G'9B\*\*%\$\$\$!\*!&

6G'9B\*\*%\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AD 330

Doosan  
Mecc Alte  
D+ & "

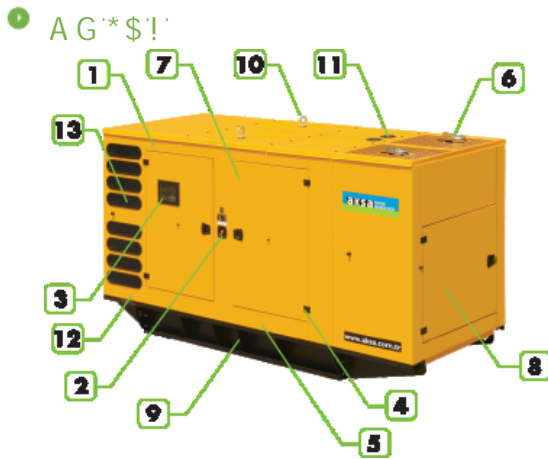

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470