

AC 880

Cummins
Mecc Alte
D+ &



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$%
CE	

2000/14/EC & \$\$\$#(#
z) \$ z' z' D:

	"	"	"	"	Amp
400/230	880,00	704,00	800,00	640,00	1154,00

fP GDE GC ;) &
) & z fDF DE % \$! % % & GC " \$ (* z & GC

Standard Specifications

z
fi ! E
z

1

ALTERNATOR

f! \$ \$ # \$ \$ \$ E
fi " " E

TRANSFER SWITCH

f! \$ \$ # \$ \$ \$ E
fi " " E

AC 880

Cummins
Mecc Alte
D+' &'

1

Manufacturer		Cummins		
Model		QSK 23 G3		
		%\$\$' "# "		
		+*, \$\$\$' "		
		0\$' \$\$\$< DQ		
	L	23,150		
	"	170 x 170		
		16,0:1		
	fl # 7	"# "	1500	
	fl 7	L	103,00	
		L	120,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	53,30		
fl ' # 7	' # "	625,80		
	' # "	147,80		
	° C	543,00		
		24 V d.c.		
	Load	%\$\$i	'+) i) \$i
	# "			
		161,00	121,00	85,00

2

		Mecc Alte		
		ECO 43-1SN/4		
	Hz	50		
	"	800,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	1154,00		
Temperature		H		


3

		fl 7		fl 7	
	"	"	"	"	L
AC 880	5950,00	3950,00	1705,00	2225,00	1500,00
		fl 7		fl 7	
	"	"	"	"	L
AK 90	9100,00	6500	2200	2353	850

AC 880

Cummins
Mecc Alte
D+' &'

1 D+' &'

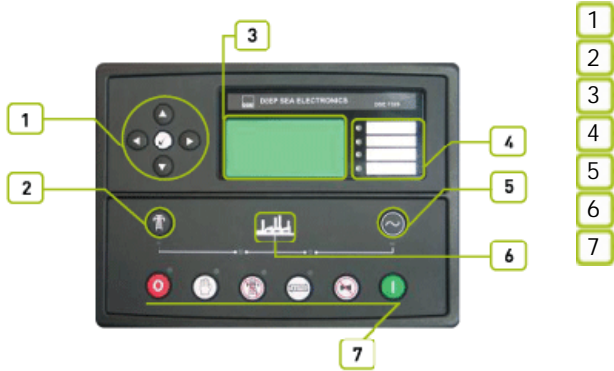

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž ž

8G9+' &\$ž 8G9+' &\$ž

ž

% &1 *('

žFG&' &žFG(,) ž

ž

AC 880

Cummins
Mecc Alte
D+ &

f@#@Bt
f@#@@t

"z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 880

Cummins
Mecc Alte
D+ & "

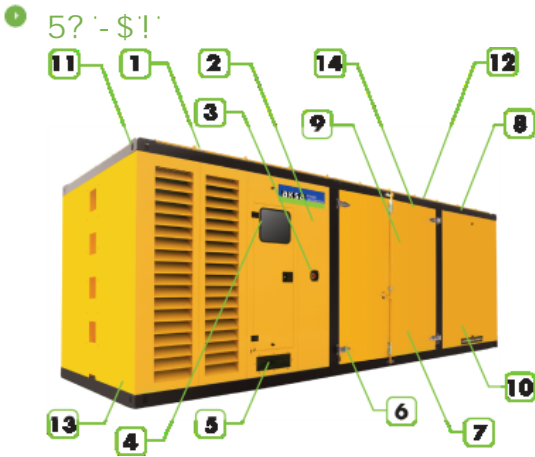

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2200
fl "L	"	6500
fl "L	"	2353
	L	850